



台州龙富特机械科技有限公司
TAIZHOU LOFTER MACHINERY CO., LTD
浙江省天台县平桥镇花前大道5号
Add: No. 5th, Huaqian Avenue, Pingqiao Town,
Tiantai County, Zhejiang Province

WeChat: 18958631920
Tel: 0576-83045888
Fax: 0576-83045688
www.tzlongfute.com

TAIZHOU
LOFTER
MACHINERY CO., LTD

All stainless steel deep well pump

台州龙富特机械科技有限公司
TAIZHOU LOFTER MACHINERY CO., LTD



TAIZHOU LOFTER MACHINERY CO., LTD

Established in 1993, Taizhou Lofter Machinery Co., Ltd. is located in Huaqian Industrial Zone, Pingqiao Town, Tiantai County, Zhejiang Province, is a production of stainless steel pump accessories, stainless steel stamping pump 4SP, 6SP, 8SP, metal stamping die design and manufacture of national high-tech Enterprise. The company strength is abundant, the prestige is good, for many years has been evaluated as "Heavy contract, keep promises" enterprise.

Lin jibing, chairman of the board of directors, has been producing deep-ploughed stamping die parts for more than 30 years. The team he leads has rich experience and excellent technology, and has provided high-quality deep well pump parts for many large domestic pump enterprises for a long time, with China's pump industry 6 listed companies in-depth cooperation, has been rated as an excellent supplier for many years..

The company adheres to the "Quality first, innovative development" concept, has a large number of domestic and foreign advanced equipment and finishing equipment, in production, welding, assembly, testing, packaging and other links, a complete R & D system, high-level quality control system, large-scale production capacity, has gotten dozens of national patents.

In the future, the company will continue to uphold the principle of customer first, integrity service, quality assurance for the purpose, and continue to provide our customers with satisfactory products.

COMPANY PROFILE

公司简介

台州龙富特机械科技有限公司创建于1993年(原天台县街头季兵机械配件厂),位于浙江省天台县平桥镇花前工业区,拥有厂房35000平方米,是一家生产不锈钢水泵配件、不锈钢冲压泵4SP、6SP、8SP泵体、五金冲压件模具设计制造的国家高新技术企业,公司实力雄厚,信誉良好,连续多年被评为“重合同,守信用”企业。

董事长林季兵深耕冲压模具配件生产三十多年,带领的团队经验丰富、技术精良,长期为众多国内大型水泵企业提供优质的深井泵配件,与中国水泵行业的6家上市公司深度合作,多年被评为优秀供应商。

公司坚持“质量第一,创新发展”的理念,拥有大量的国内外先进设备和精加工装备,在生产、焊接,装配、检测、包装等各环节,建立了完整的研发体系、高水平质量管控体系、规模化生产能力,已获得了数十项国家专利。

未来,公司继续秉承客户至上的原则,诚信服务,质量保障为宗旨,不断为广大用户提供满意的产品。

www.tzlongfute.com

QUALITY CONTROL

品质管理

以严谨的态度创造高效工作, 以科学的手段提供有效的数据。对比标杆找差距, 把企业的目光紧紧盯住业界最好水平, 明确自身与业界最佳的差距。不断寻求产品的改进与创新, 超越顾客期望, 并采用适宜的防错手段持续改进产品和服务质量。

Rigorous attitude to create efficient work, scientific means to provide valid data. Contrast benchmarking to find the gap, the eyes of the enterprise closely stared at the best level of the industry, clear their own gap with the best in the industry. Constantly seek product improvement and innovation, exceed customer expectations, and adopt appropriate error prevention measures to continuously improve product and service quality.



我们的合作伙伴

OUR PARTNERS

DONGYIN®
东音股份



SHIMGE®
新界泵业



LEO®
利欧

FANG XIN®
方鑫机电

JD®
佳迪泵业

HAPPY®
豪贝泵业

更多合作客户.....

More cooperative customers.....

CONTENTS

目录

All stainless steel
deep well pump

01

4SP2T
SUBMERSIBLE PUMPS

02

4SP3T
SUBMERSIBLE PUMPS

03

4SP5T
SUBMERSIBLE PUMPS

04

4SP8T
SUBMERSIBLE PUMPS

05

4SP14T
SUBMERSIBLE PUMPS

06

4SP17T
SUBMERSIBLE PUMPS

07

6SP30T
SUBMERSIBLE PUMPS

08

6SP46T
SUBMERSIBLE PUMPS

09

6SP60T
SUBMERSIBLE PUMPS

10

8SP77T
SUBMERSIBLE PUMPS

11

8SP95T
SUBMERSIBLE PUMPS

12-13


配件
ACCESSORIES

4SP2T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

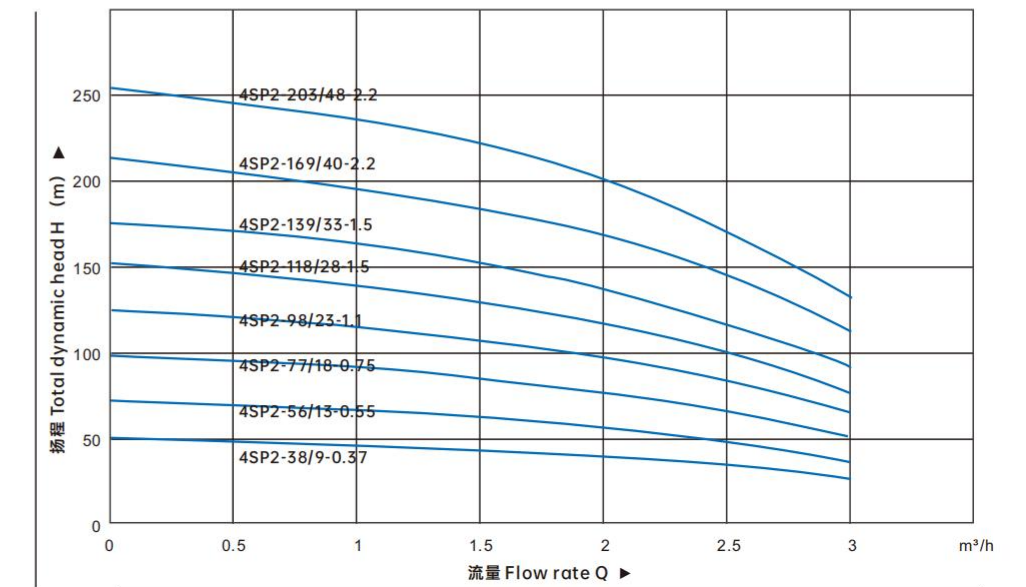

4SP系列深井潜水电泵性能参数 2T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)							电泵尺寸			
			流量 (m³/h)	0	0.5	1	1.5	2	2.5	3	L1 (mm)	L2 (mm)	出水口径
220V 单相	4SP2-38/9-0.37(S)	0.37	扬程 (m)	49	45	43	40	38	33	25	342	397	32mm 1.25"
	4SP2-56/13-0.55(S)	0.55		70	68	65	60	56	48	396	426	417	
	4SP2-77/18-0.75(S)	0.75		99	93	90	85	77	66	50	531	442	
	4SP2-98/23-1.1(S)	1.1		122	120	115	107	98	84	66	636	482	
	4SP2-118/28-1.5(S)	1.5		151	148	140	130	118	100	78	765	522	
	4SP2-139/33-1.5(S)	1.5		178	178	165	152	139	118	93	870	522	
	4SP2-169/40-2.2(S)	2.2		215	207	197	185	169	143	113	1017	592	
	4SP2-203/48-2.2(S)	2.2		258	248	236	223	203	172	134	1185	592	
380V 三相	4SP2-38/9-0.37(T)	0.37	扬程 (m)	49	45	43	40	38	33	25	342	387	
	4SP2-56/13-0.55(T)	0.55		70	68	65	60	56	48	36	426	397	
	4SP2-77/18-0.75(T)	0.75		99	93	90	85	77	66	50	531	432	
	4SP2-98/23-1.1(T)	1.1		122	120	115	107	98	84	66	636	452	
	4SP2-118/28-1.5(T)	1.5		151	148	140	130	118	100	78	765	492	
	4SP2-139/33-1.5(T)	1.5		178	172	165	152	139	118	93	870	492	
	4SP2-169/40-2.2(T)	2.2		215	207	197	185	169	143	113	1017	548	
	4SP2-203/48-2.2(T)	2.2		258	248	236	223	203	172	134	1185	548	

注:1、浅蓝色区域为最佳使用范围


2、单相电泵的电机有内置电容和外置电容两种供选择

3、此系列所有电机均有铸铁端盖和铜端盖两种供选择

4SP3T

SUBMERSIBLE PUMPS

性能曲线/PERFORMANCE CURVES

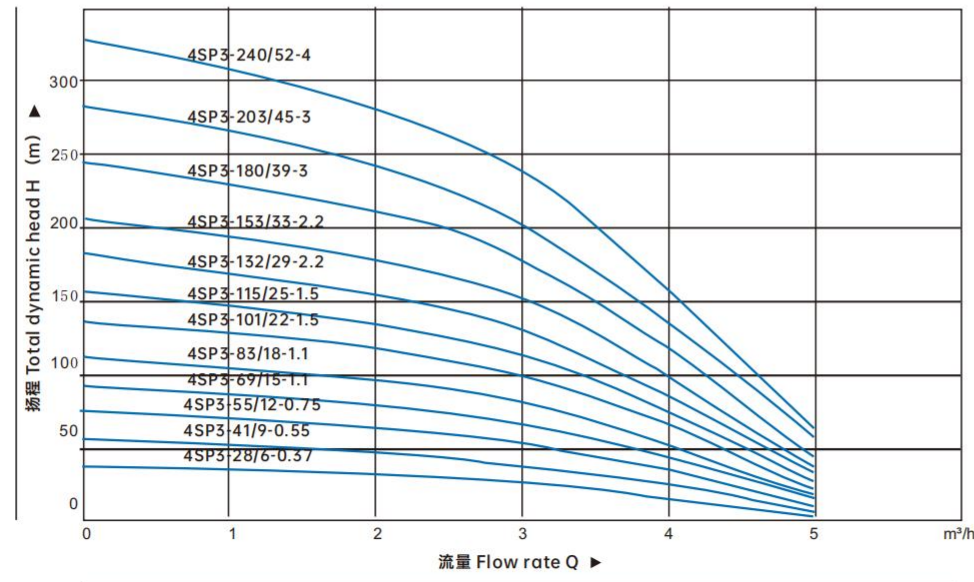

4SP系列深井潜水电泵性能参数 3T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)									电泵尺寸		
			流量 (m³/h)	0	1	1.8	2	3	4	4.2	5	L1 (mm)	L2 (mm)	出水口径
220V 单相	4SP3-28/6-0.37(S)	0.37	扬程 (m)	38	35	33	30	28	17	16	3	279	397	32mm 1.25"
	4SP3-41/9-0.55(S)	0.55		57	51	50	47	41	26	24	6	342	417	
	4SP3-55/12-0.75(S)	0.75		76	71	67	63	55	35	33	11	405	442	
	4SP3-69/15-1.1(S)	1.1		95	88	83	80	69	44	41	16	468	482	
	4SP3-83/18-1.1(S)	1.1		114	106	100	96	83	53	49	18	531	482	
	4SP3-101/22-1.5(S)	1.5		139	129	122	118	101	65	60	22	615	522	
	4SP3-115/25-1.5(S)	1.5		158	147	138	134	115	74	68	28	678	522	
	4SP3-132/29-2.2(S)	2.2		184	168	158	153	132	86	77	33	786	592	
	4SP3-153/33-2.2(S)	2.2		208	194	182	174	153	98	89	38	870	592	
380V 三相	4SP3-28/6-0.37(T)	0.37	扬程 (m)	38	35	33	30	28	17	16	3	279	387	
	4SP3-41/9-0.55(T)	0.55		57	51	50	47	41	26	24	6	342	397	
	4SP3-55/12-0.75(T)	0.75		76	71	67	63	55	35	33	11	405	432	
	4SP3-69/15-1.1(T)	1.1		95	88	83	80	69	44	41	16	468	452	
	4SP3-83/18-1.1(T)	1.1		114	106	100	96	83	53	49	18	531	452	
	4SP3-101/22-1.5(T)	1.5		139	129	122	118	101	65	60	22	615	492	
	4SP3-115/25-1.5(T)	1.5		158	147	138	134	115	74	68	28	678	492	
	4SP3-132/29-2.2(T)	2.2		184	168	158	153	132	86	77	33	786	548	
	4SP3-153/33-2.2(T)	2.2		208	194	182	174	153	98	89	38	870	548	
	4SP3-180/39-3(T)	3		246	228	216	206	180	116	106	45	996	592	
	4SP3-203/45-3(T)	3		284	264	245	240	203	134	123	56	1122	592	
	4SP3-240/52-4(T)	4		328	307	288	277	240	156	141	65	1269	657	


注:1、浅蓝色区域为最佳使用范围

- 2、单相电泵的电机有内置电容和外置电容两种供选择
- 3、此系列所有电机均有铸铁端盖和铜端盖两种供选择

4SP5T

SUBMERSIBLE PUMPS

性能曲线/PERFORMANCE CURVES

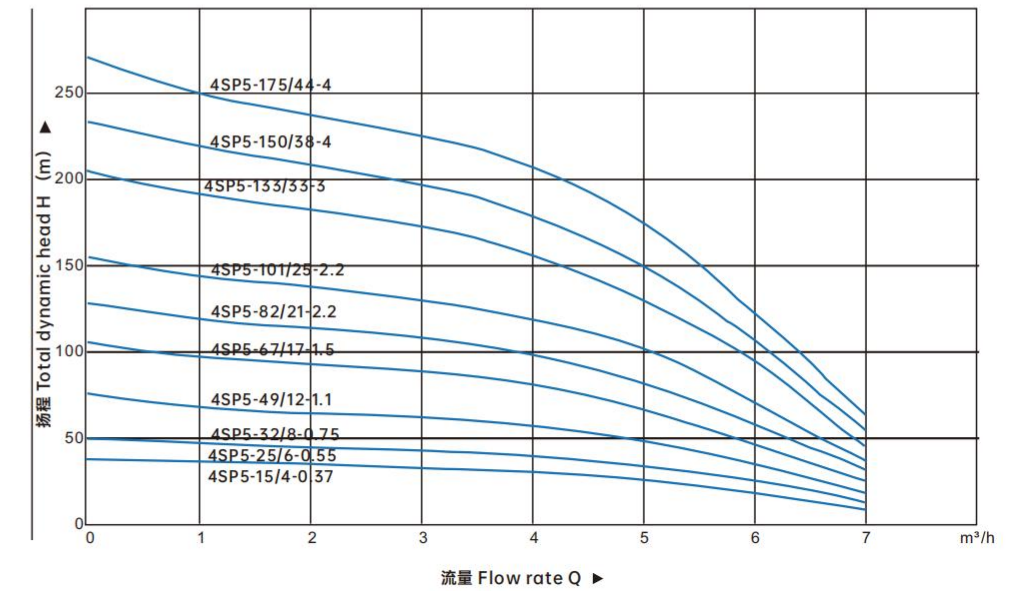

4SP系列深井潜水电泵性能参数 5T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)										电泵尺寸		
			流量 (m³/h)	0	1	2	2.7	3	4	5	6	7	L1 (mm)	L2 (mm)	出水口径
220V 单相	4SP5-15/4-0.37(S)	0.37	扬程 (m)	25	23	22	21	20	18	15	10	5	237	397	40mm 15"
	4SP5-25/6-0.55(S)	0.55		38	36	33	32	31	28	25	17	8	279	417	
	4SP5-32/8-0.75(S)	0.75		49	45	43	43	42	39	32	23	12	321	442	
	4SP5-49/12-1.1(S)	1.1		74	68	64	63	62	57	49	37	18	405	482	
	4SP5-67/17-1.5(S)	1.5		105	96	91	90	89	81	67	47	26	510	522	
	4SP5-82/21-2.2(S)	2.2		128	118	113	110	109	99	82	59	32	594	592	
380V 三相	4SP5-101/25-2.2(S)	2.2	扬程 (m)	152	142	136	132	130	118	101	71	38	678	592	
	4SP5-15/4-0.37(T)	0.37		25	23	22	21	20	18	15	10	5	237	387	
	4SP5-25/6-0.55(T)	0.55		38	36	33	32	31	28	25	17	8	279	397	
	4SP5-32/8-0.75(T)	0.75		49	45	43	43	42	39	32	23	12	321	432	
	4SP5-49/12-1.1(T)	1.1		74	68	64	63	62	57	49	37	18	405	452	
	4SP5-67/17-1.5(T)	1.5		105	96	91	90	89	81	67	47	26	510	492	
	4SP5-82/21-2.2(T)	2.2		128	118	113	110	109	99	82	59	32	594	548	
	4SP5-101/25-2.2(T)	2.2		152	142	136	132	130	118	101	71	38	678	548	
	4SP5-130/33-3(T)	3		203	191	182	177	173	156	130	95	48	870	592	
	4SP5-150/38-4(T)	4		232	218	208	200	199	178	150	108	57	975	657	
	4SP5-175/44-4(T)	4		271	250	238	230	228	208	175	122	66	1101	657	

注:1、浅蓝色区域为最佳使用范围


- 2、单相电泵的电机有内置电容和外置电容两种供选择
- 3、此系列所有电机均有铸铁端盖和铜端盖两种供选择

4SP8T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

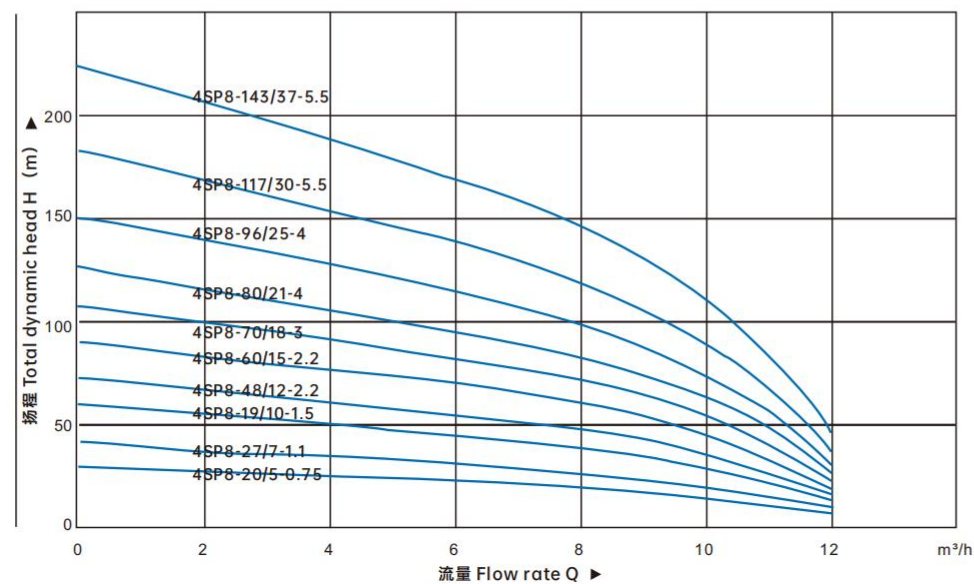


4SP14T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

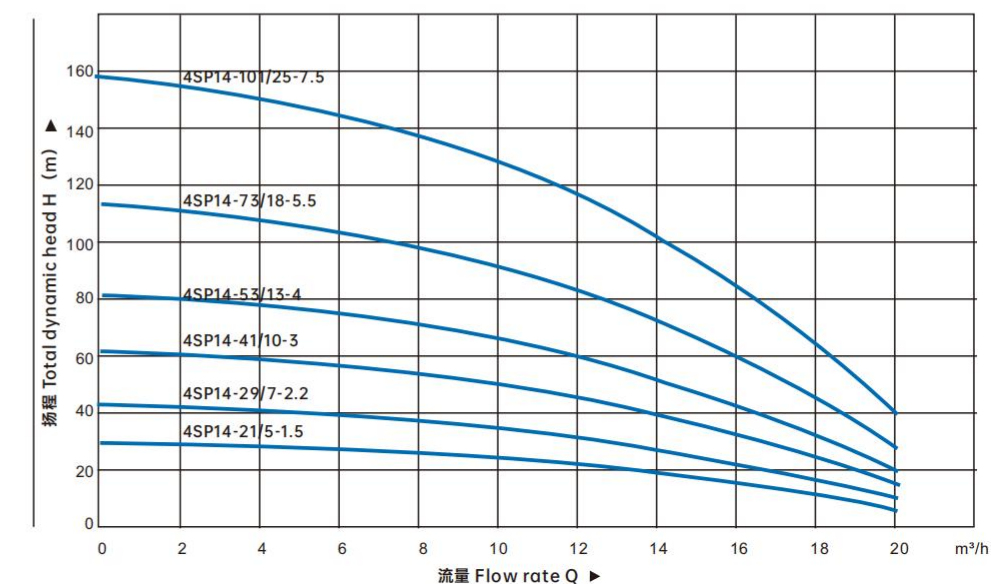

4SP系列深井潜水电泵性能参数 8T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)									电泵尺寸			
			流量 (m³/h)	0	2	4	4.2	6	8	10	10.8	12	L1 (mm)	L2 (mm)	出水口径
220V 单相	4SP8-20/5-0.75(S)	0.75	扬程 (m)	30	28	26	26	23	20	14	12	6	335	442	50mm 2"
	4SP8-27/7-1.1(S)	1.1		42	38	36	35	32	27	20	17	9	397	482	
	4SP8-39/10-1.5(S)	1.5		60	54	50	50	46	39	29	24	12	490	522	
	4SP8-48/12-2.2(S)	2.2		74	66	61	61	55	48	36	28	15	552	592	
	4SP8-60/15-2.2(S)	2.2		90	81	77	76	68	60	44	36	18	645	432	
380V 单相	4SP8-20/5-0.75(T)	0.75	30	28	26	26	23	20	14	12	6	335	452		
	4SP8-27/7-1.1(T)	1.1	42	38	36	35	32	27	20	17	9	397	492		
	4SP8-39/10-1.5(T)	1.5	60	54	50	50	46	39	29	24	12	490	492		
	4SP8-48/12-2.2(T)	2.2	74	66	61	61	55	48	36	28	15	552	548		
	4SP8-60/15-2.2(T)	2.2	90	81	77	76	68	60	44	36	18	645	548		
	4SP8-70/18-3(T)	3	108	97	92	90	82	70	53	44	22	738	592		
	4SP8-80/21-4(T)	4	126	113	106	105	96	80	62	51	25	831	657		
	4SP8-96/25-4(T)	4	150	135	127	127	114	96	72	60	30	955	657		
	4SP8-117/30-5.5(T)	5.5	181	162	153	151	136	117	86	73	36	1110	755		
4SP8-143/37-5.5(T)	5.5	223	205	189	188	168	143	106	89	45	1327	755			

注:1、浅蓝色区域为最佳使用范围

2、单相电泵的电机有内置电容和外置电容两种供选择

3、此系列所有电机均有铸铁端盖和铜端盖两种供选择

4SP系列深井潜水电泵性能参数 14T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)																电泵尺寸		
			流量 (m³/h)	0	2	4	6	8	10	12	14	16	18	18.9	20	L1 (mm)	L2 (mm)	出水口径			
220V 单相	4SP14-21/5-1.5(S)	1.5	扬程 (m)	31	30	30	29	26	25	24	21	17	13	11	8	413	522	50mm 2"			
	4SP14-29/7-2.2(S)	2.2		44	42	41	40	37	36	33	29	24	18	16	11	506	592				
380V 三相	4SP14-21/5-1.5	1.5	31	30	30	29	26	25	24	21	17	13	11	8	413	492					
	4SP14-29/7-2.2	2.2	44	42	41	40	37	36	33	29	24	18	16	11	506	548					
	4SP14-41/10-3(S)	3	63	61	60	57	55	52	47	41	34	26	22	16	645	592					
	4SP14-53/13-4(S)	4	82	80	78	74	71	67	61	53	44	34	28	21	785	657					
	4SP14-73/18-5.5(T)	5.5	114	111	108	103	98	93	85	73	61	47	39	29	1017	757					
	4SP14-101/25-7.5(T)	7.5	158	154	150	143	136	129	118	101	85	65	54	40	1343	892					

注:1、浅蓝色区域为最佳使用范围


2、0.55kW~7.5kw可配4寸电机, 4寸电机有铸铁端盖和铜端盖两种供选择

6SP17T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

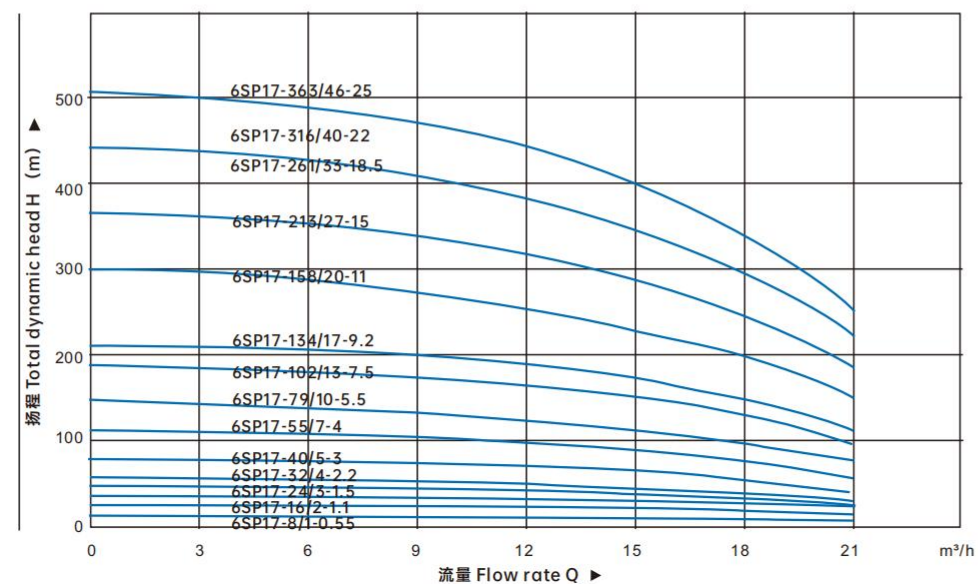

6SP系列深井潜水电泵性能参数 17T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)										电泵尺寸			
			流量 (m³/h)	0	3	6	9	12	15	17	18	21	L1	L1 4寸	L2 6寸	出水口径
380V 三相	6SP17-8/1-0.55(T)	0.55	扬程 (m)	11	11	11	11	10	9	8	8	6	322	397	-	65mm 25"
	6SP17-16/2-1.1(T)	1.1		22	22	21	21	19	18	16	16	11	383	452	-	
	6SP17-24/3-1.5(T)	1.5		33	32	31	31	28	29	24	24	17	443	492	-	
	6SP17-32/4-2.2(T)	2.2		44	43	42	41	39	35	32	30	22	504	548	-	
	6SP17-40/5-3(T)	3		55	54	53	52	48	43	40	37	28	564	592	662	
	6SP17-55/7-4(T)	4		77	76	74	73	68	61	55	52	39	685	657	767	
	6SP17-79/10-5.5(T)	5.5		110	108	106	104	97	87	79	74	56	867	757	807	
	6SP17-102/13-7.5(T)	7.5		143	140	137	135	126	113	102	96	73	1048	892	827	
	6SP17-134/17-9.2(T)	9.2		187	183	180	177	165	148	134	126	95	1306	-	852	
	6SP17-158/20-11(T)	11		220	216	212	208	194	174	158	148	112	1487	-	892	
	6SP17-213/27-15(T)	15		297	291	286	281	262	235	213	200	151	1911	-	942	
	6SP17-261/33-18.5(T)	18.5		363	356	349	343	320	287	261	244	185	2274	-	1032	
	6SP17-316/40-22(T)	22		440	432	424	416	388	348	316	296	224	2697	-	1077	
	6SP17-363/46-25(T)	25		506	496	487	478	446	400	363	340	257	3060	-	1167	

注:1、浅蓝色区域为最佳使用范围


2、0.55kW~7.5kW可配4寸电机, 4寸电机有铸铁端盖和铜端盖两种供选择

6SP30T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

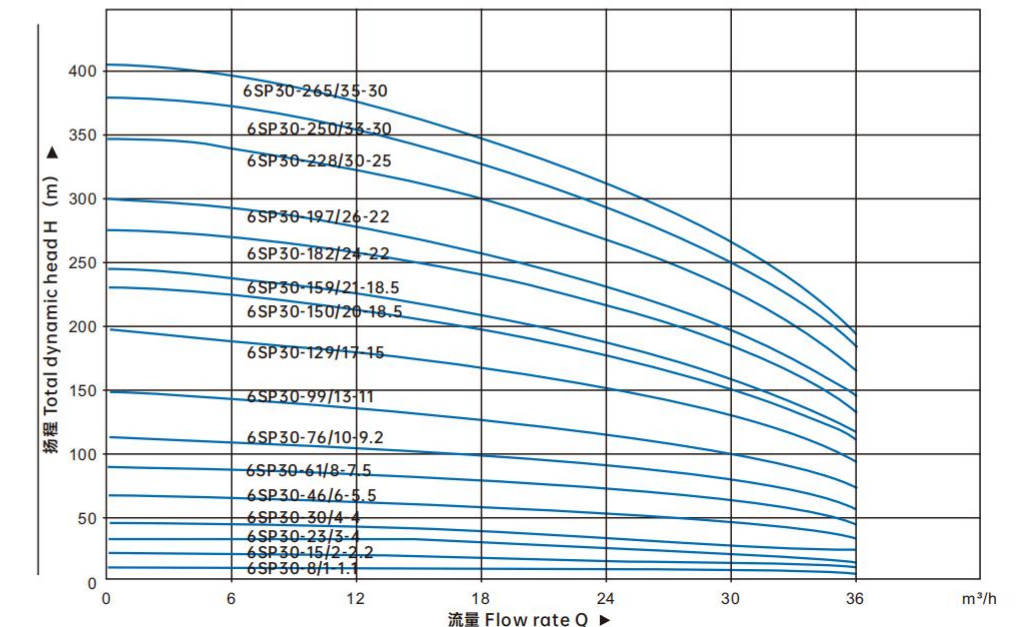

6SP系列深井潜水电泵性能参数 30T

电源	电泵型号	功率 (Kw)	泵参数 (n≈2850r/min)							电泵尺寸				
			流量 (m³/h)	0	6	12	18	24	30	36	L1	L2 4寸	L3 6寸	出水口径
380V 三相	6SP30-8/1-1.1(T)	1.1	扬程 (m)	12	11	11	10	9	8	6	358	452	-	75mm RC3
	6SP30-15/2-2.2(T)	2.2		23	22	21	20	18	15	11	454	548	-	
	6SP30-23/3-3(T)	3		34	34	32	30	27	23	16	550	592	662	
	6SP30-30/4-4(T)	4		46	45	42	40	36	30	22	646	657	767	
	6SP30-46/6-5.5(T)	5.5		69	68	64	59	53	46	33	838	757	807	
	6SP30-61/8-7.5(T)	7.5		92	91	85	79	71	61	44	1030	892	827	
	6SP30-76/10-9.2(T)	9.2		115	113	106	98	89	76	55	1237	-	852	
	6SP30-99/13-11(T)	11		149	147	138	127	115	99	72	1525	-	892	
	6SP30-129/17-15(T)	15		197	193	181	167	151	129	94	1909	-	942	
	6SP30-150/20-18.5(T)	18.5		231	227	212	196	177	150	110	2197	-	1032	
	6SP30-159/21-18.5(T)	18.5		243	238	223	206	186	159	116	2293	-	1032	
	6SP30-182/24-22(T)	22		278	272	255	240	213	182	132	2581	-	1077	
	6SP30-197/26-22(T)	22		301	295	276	255	231	197	143	2773	-	1077	
	6SP30-228/30-25(T)	25		347	340	319	298	266	228	165	3157	-	1167	
	6SP30-250/33-30(T)	30		382	374	351	323	293	250	182	3445	-	1237	
	6SP30-265/35-30(T)	30		405	397	372	343	311	265	193	3637	-	1237	


注:1、浅蓝色区域为最佳使用范围

2、1.1kW~7.5kW可配4寸电机, 4寸电机有铸铁端盖和铜端盖两种供选择

6SP46T SUBMERSIBLE PUMPS




性能曲线/PERFORMANCE CURVES

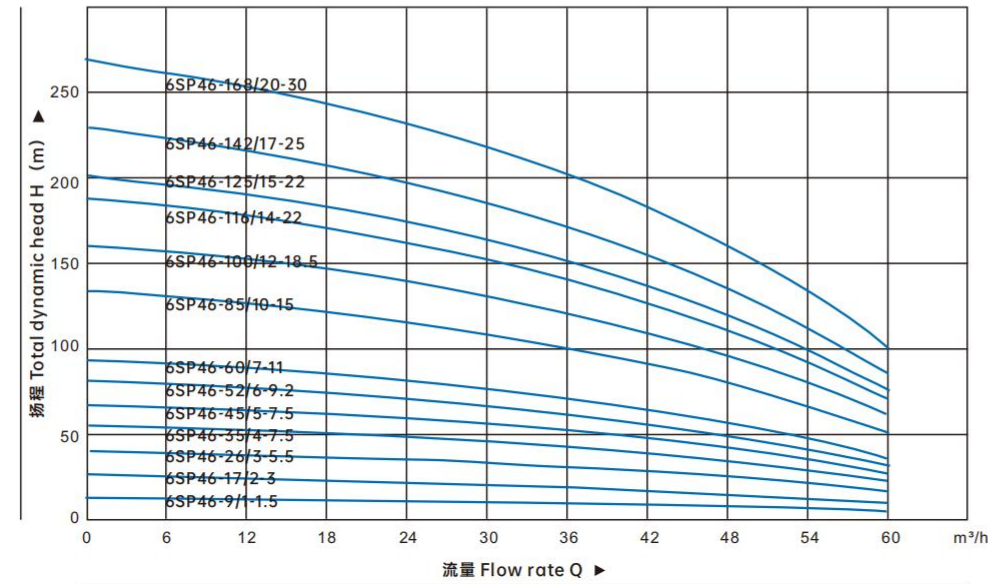

6SP60T SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

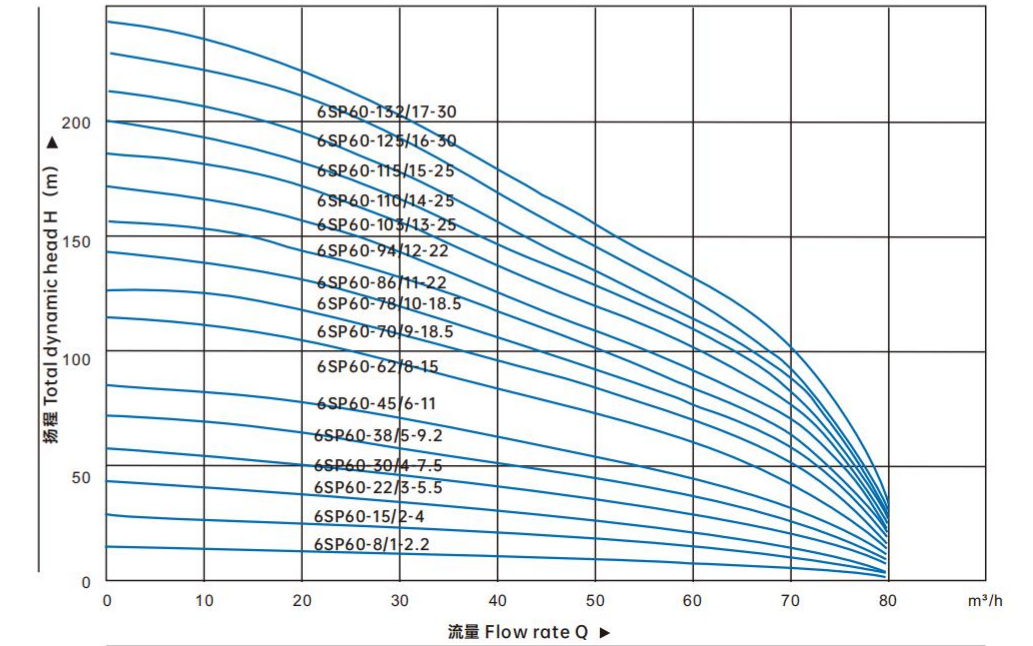

6SP系列深井潜水电泵性能参数 46T

电源	电泵型号	功率 (Kw)	流量 (m³/h)	泵参数 (n≈2850r/min)												电泵尺寸			
				0	6	12	18	24	30	36	42	46	48	54	60	L1	L1 4寸	L2 6寸	出水口径
380V 三相	6SP46-9/1-1.5(T)	1.5	扬程 (m)	14	13	13	12	11	11	10	9	9	8	7	5	358	492	-	75mm RC3
	6SP46-17/2-3(T)	3		27	26	25	24	23	22	20	18	17	16	13	10	454	592	662	
	6SP46-26/3-5.5(T)	5.5		40	39	38	36	35	33	30	27	26	24	20	15	550	757	807	
	6SP46-35/4-7.5(T)	7.5		54	52	51	49	46	43	40	37	35	32	27	20	646	892	827	
	6SP46-45/5-7.5(T)	7.5		67	66	64	61	58	54	50	46	45	40	33	25	742	892	827	
	6SP46-52/6-9.2(T)	9.2		81	79	76	73	69	65	60	55	52	48	40	30	853	-	852	
	6SP46-60/7-11(T)	11		94	92	89	85	81	76	70	64	60	56	47	35	949	-	892	
	6SP46-85/10-15(T)	15		134	121	127	121	115	109	101	91	85	86	67	50	1237	-	942	
	6SP46-100/12-18.5(T)	18.5		161	158	153	146	138	130	121	110	100	96	80	60	1429	-	1032	
	6SP46-116/14-22(T)	22		188	184	178	170	161	152	141	128	116	112	93	70	1621	-	1077	
	6SP46-125/15-22(T)	22		202	197	191	182	173	163	151	137	125	120	100	75	1717	-	1077	
	6SP46-142/17-25(T)	25		229	223	216	206	196	185	171	155	142	136	113	85	1909	-	1167	
6SP46-168/20-30(T)	30	269	263	254	243	231	217	201	183	168	160	133	100	2197	-	1237			

注:1、浅蓝色区域为最佳使用范围
2、1.5kW~7.5kW可配4寸电机, 4寸电机有铸铁端盖和铜端盖两种供选择

6SP系列深井潜水电泵性能参数 60T

电源	电泵型号	功率 (Kw)	流量 (m³/h)	泵参数 (n≈2850r/min)												电泵尺寸			
				0	10	20	30	40	50	60	70	80	L1	L1 4寸	L2 6寸	出水口径			
380V 三相	6SP60-8/1-2.2(T)	2.2	扬程 (m)	14	14	13	12	11	9	8	6	2	358	548	-	100mm RC4			
	6SP60-15/2-4(T)	4		28	28	26	24	21	18	15	12	3	454	657	767				
	6SP60-22/3-5.5(T)	5.5		42	41	39	35	30	26	22	16	4	550	757	807				
	6SP60-30/4-7.5(T)	7.5		56	55	52	47	40	35	30	22	8	646	892	827				
	6SP60-38/5-9.2(T)、9.2	9.2		71	68	66	59	51	44	38	28	10	757	-	852				
	6SP60-45/6-11(T)	11		85	83	79	71	62	54	45	34	11	853	-	892				
	6SP60-62/8-15(T)	15		114	112	106	95	84	72	62	46	14	1045	-	942				
	6SP60-70/9-18.5(T)	18.5		128	127	120	109	95	83	70	54	16	1141	-	1032				
	6SP60-78/10-18.5(T)	18.5		143	140	133	120	105	92	78	60	18	1237	-	1032				
	6SP60-86/11-22(T)	22		158	155	143	131	118	101	86	66	21	1333	-	1077				
	6SP60-94/12-22(T)	22		172	167	160	142	125	110	94	72	22	1429	-	1077				
	6SP60-103/13-25(T)	25		187	182	172	158	138	120	103	80	25	1525	-	1167				
	6SP60-110/14-25(T)	25		200	195	182	168	148	130	110	85	27	1621	-	1167				
	6SP60-115/15-25(T)	25		213	208	198	179	157	135	115	90	29	1717	-	1167				
	6SP60-125/16-30(T)	30		230	223	211	191	170	147	125	95	32	1813	-	1237				
	6SP60-132/17-30(T)	30		243	238	222	201	178	155	132	102	34	1909	-	1237				


注:1、浅蓝色区域为最佳使用范围。
2、2.2kW~7.5kW可配4寸电机, 4寸电机有铸铁端盖和铜端盖两种供选择

8SP77T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

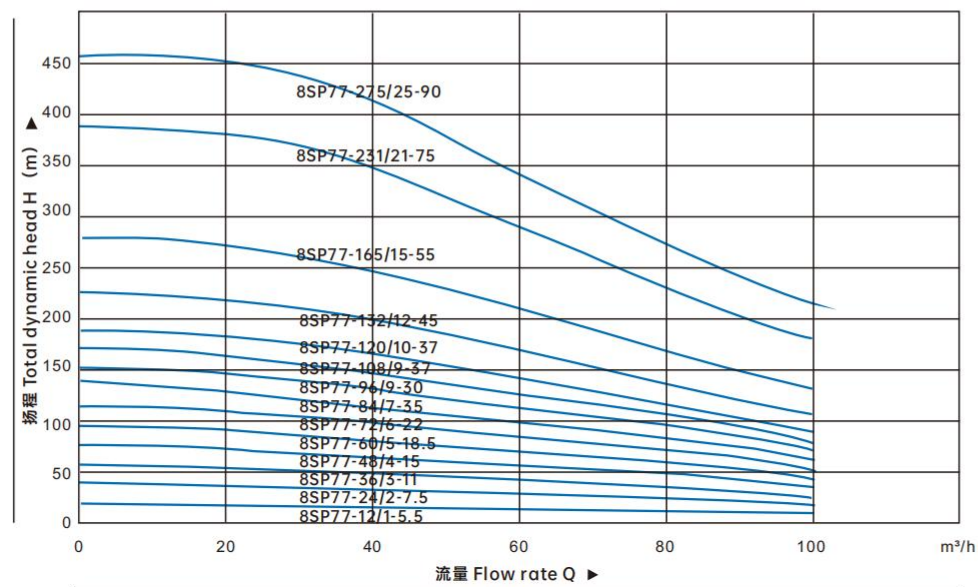


8SP95T

SUBMERSIBLE PUMPS



性能曲线/PERFORMANCE CURVES

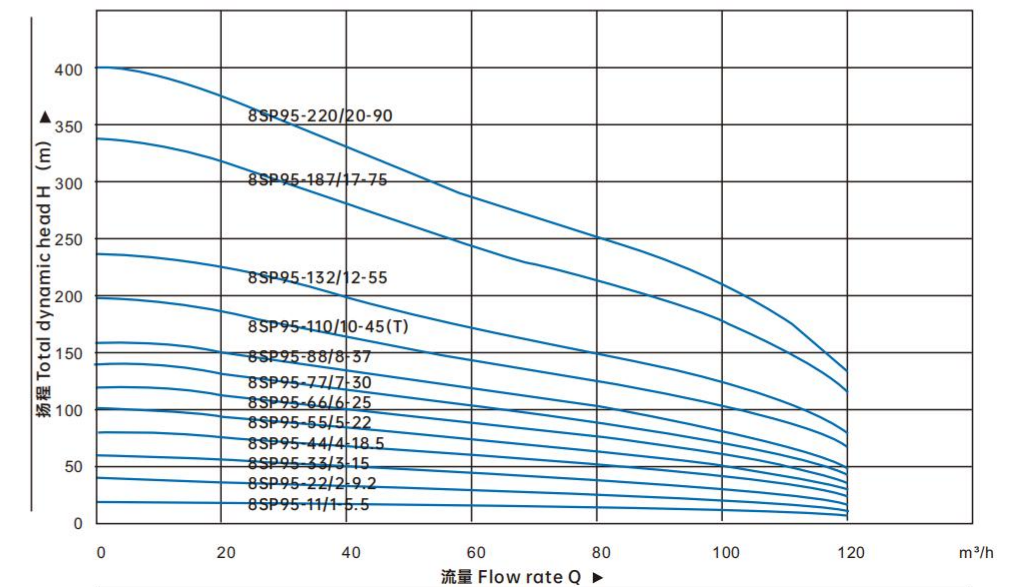

8SP系列深井潜水电泵性能参数 77T

电源	水泵型号	功率 (Kw)	流量 (m³/h)	泵参数 (n≈2850r/min)								水泵尺寸				
				0	20	40	55	60	77	80	96	100	L1	L1 6寸	L2 8寸	出水口径
380V 三相	8SP77-12/1-5.5(T)	5.5	扬程 (m)	21	17	17	14	13	12	12	9.5	9	458	807	-	125mm RC5
	8SP77-24/2-7.5(T)	7.5		40	34	34	29	28	24	23	19	18	586	827	-	
	8SP77-36/3-11(T)	11		58	51	51	44	43	36	35	28	24	714	892	-	
	8SP77-48/4-15(T)	15		77	65	65	58	56	48	46	38	34	842	942	-	
	8SP77-60/5-18.5(T)	18.5		96	81	81	73	70	60	58	48	42	970	1032	-	
	8SP77-72/6-22(T)	22		115	98	98	88	83	72	70	57	52	1098	1077	-	
	8SP77-84/7-25(T)	25		140	112	112	104	94	84	81	67	63	1226	1167	-	
	8SP77-96/8-30(T)	30		153	132	132	120	110	86	92	76	72	1512	1237	1285	
	8SP77-108/9-37(T)	37		172	147	147	132	124	108	102	86	79	1640	1377	1330	
	8SP77-120/10-37(T)	37		190	165	165	148	140	120	114	96	88	1788	1377	1330	
	8SP77-132/12-45(T)	45		226	199	199	176	166	144	134	114	104	2024	1450	1385	
	8SP77-165/15-55(T)	55		280	250	250	218	205	180	164	141	128	2408	-	1520	
	8SP77-231/21-75(T)	75		388	352	352	302	283	252	224	195	176	3176	-	1650	
	8SP77-275/25-90(T)	90		460	420	420	358	335	300	264	231	208	3688	-	1725	

注:浅蓝色区域为最佳使用范围, 5.5kW~30kw推荐使用6"电机, 37kW~90kw推荐使用8"电机。

8SP系列深井潜水电泵性能参数 95T

电源	水泵型号	功率 (Kw)	流量 (m³/h)	泵参数 (n≈2850r/min)								水泵尺寸					
				0	20	40	60	65	80	95	100	108	120	L1	L1 6寸	L2 8寸	出水口径
380V 三相	8SP95-11/1-5.5(T)	5.5	扬程 (m)	21	19	17	15	14	13	11	10	9	6	458	807	-	125mm RC5
	8SP95-22/2-9.2(T)	9.2		41	38	34	30	28	26	22	20	18	12	586	852	-	
	8SP95-33/3-15(T)	15		61	57	51	45	42	39	33	30	27	18	714	942	-	
	8SP95-44/4-18.5(T)	18.5		81	76	68	60	56	52	44	40	36	24	842	1032	-	
	8SP95-55/5-22(T)	22		102	95	85	75	70	65	55	50	45	30	970	1077	-	
	8SP95-66/6-25(T)	25		121	114	102	90	84	78	66	60	54	36	1098	1167	1285	
	8SP95-77/7-30(T)	30		141	133	119	105	98	91	77	70	63	42	1226	1237	1330	
	8SP95-88/8-37(T)	37		161	152	136	120	112	104	88	80	72	48	1512	1377	1330	
	8SP95-110/10-45(T)	45		199	190	165	141	137	131	113	104	88	68	1768	1450	1385	
	8SP95-132/12-55(T)	55		239	228	198	169	165	157	135	124	106	82	2024	-	1520	
	8SP95-187/17-75(T)	75		338	323	281	239	234	222	192	176	150	116	2664	-	1650	
	8SP95-220/20-90(T)	90		398	380	330	281	275	261	226	207	176	137	3048	-	1725	

注:浅蓝色区域为最佳使用范围, 5.5kW~30kw推荐使用6"电机, 37kW~90kw推荐使用8"电机。

